



QUADRODEC®

Quadrodec® T-Stück 90° Rechteckig 220x55 mm auf rund Ø125mm

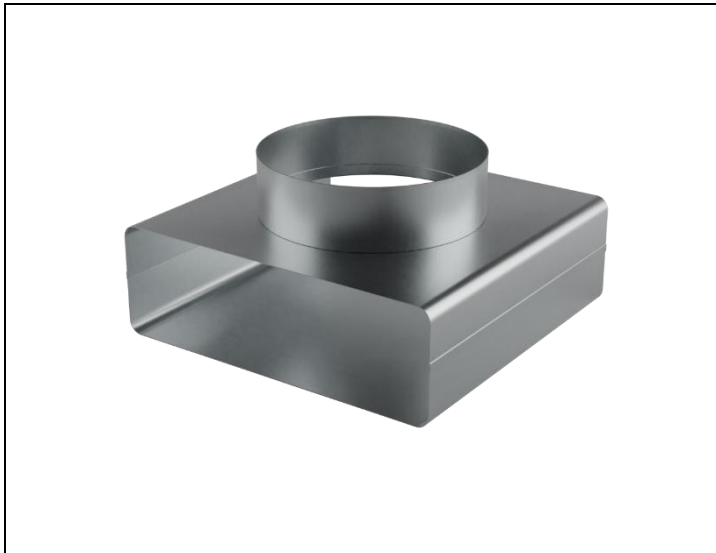

Maße QDTRFF220X55-125

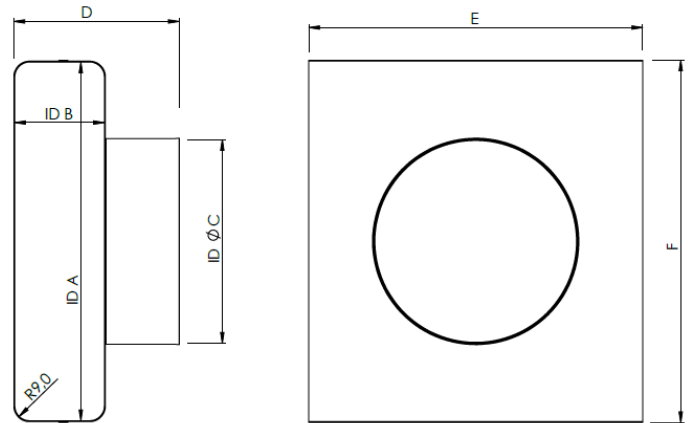

ID A	ID B	ID ØC	D	E	F
mm	mm	mm	mm	mm	mm
220 ±0,5	55 ±0,5	125 -0,+0,5	102	205	223

Description


Horizontales T-Stück 90°, 3-seitiger Muffen Anschluss.

Verbindung: Muffe/Muffe/Muffe
Material: DX53D, verzinkt 275 g/m2
EN ISO 9227:2006

Klassifikation

Gemäß EN 13501: Klasse A1
Gemäß EN 12237: Dichtheitsklasse D/(ATC2)
Gemäß Ansi Ashrae 120-2017: Druckverlust


Dichtheitsklasse

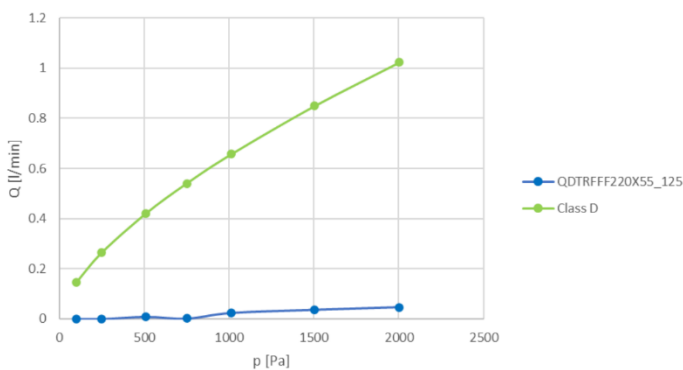

Dieser Artikel kann einfach mit unserem patentierten Verbinder verbunden werden **QDCMM220X55**.

Auch lieferbar in 250X80mm bis Ø160mm.

Druckverlust

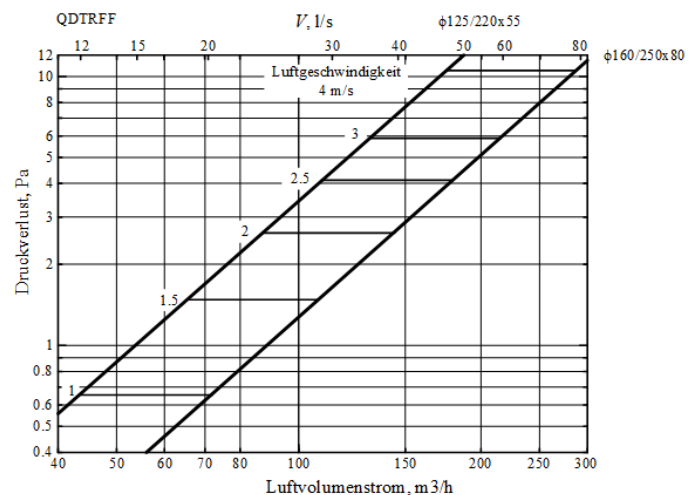

LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

TRADEMARKS:

QUADRODEC, The DEC logo and DEC International are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.

RESTRICTIONS:

The QUADRODEC ducts are not suitable for discharging combustion products from open fireplaces and oil-fired boilers. Neither are the ducts suitable for transporting air with a high concentration of acid and base.

