


QUADRODEC®

Quadrodec® Rectangular bracket 220X55mm

Order code: **QDRB220X55**

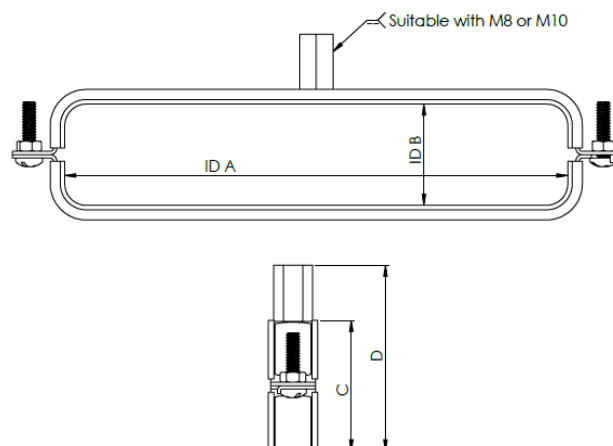

Description

Unique rectangular quick mounting bracket, connection thread M8/M10. Can be used universally for the Quadrodec rectangular system. In addition to a solid mounting, the EPDM insert also reduces the transmission of vibrations.

The QDRB220X55 is also functional as a channel wall hanger when installing the Quadrodec rectangular system in double floors.

Material:	Zinc plated 80g/m ²
Inner rubber:	EPDM IEC 60695-2-11:2014 (TÜV) REACH, ROHs (TÜV)

Classification

EN 13501-1:2018:	Class A1 as part of the Quadrodec rectangular system.
------------------	---

Also available in 250X80mm.


ID A	ID B	C	D
mm	mm	mm	mm
225 ±0,5	45 ±0,5	58	82,5

The product with article code (QD)RB220X55 is class 1 of fire reaction only when used in combination with a system created (according to instructions) with 2 classified articles with the following codes:

(QD)P220X55/0,5+(QD)P220X55/0,5;
(QD)P220X55/0,5+(QD)P220X55/1,0;
(QD)P220X55/1,0+(QD)P220X55/1,0.

Including:

STICKSCREW 8*60 M8*20
Self tapping Double-headed inner hex screw M8*20
L=60mm M8=20mm Self tapping M8 =30mm

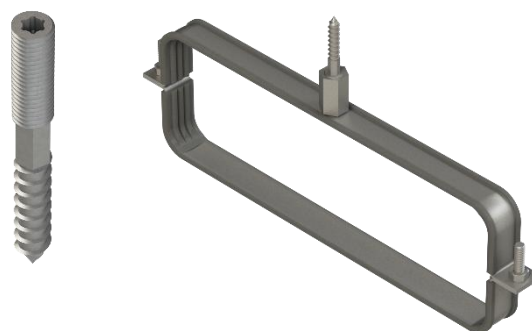

LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

TRADEMARKS:

QUADRODEC, the DEC logo and DEC International are trademarks or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.

RESTRICTIONS:

The QUADRODEC ducts are not suitable for discharging combustion products from open fireplaces and oil-fired boilers. Neither are the ducts suitable for transporting air with a high concentration of acid and base.

