



SEMIDEC

SEMI FLEXIBLE CORRUGATED DUCTING

SEMIDEC is a superb flexible duct constructed of one layer of corrugated aluminum. Due to the closing seam and corrugation, airtightness and flexibility is achieved.

APPLICATION

- Suitable for mechanical air supply systems and air conditioning systems.
- Systems, where vapors should be exhausted
- Above mentioned systems, where classification M0 or A1 is required

SPECIFICATIONS

Article code:	DXD{Ø}
Temperature range:	-30°C to 250°C Peak 400°C
Operating pressure:	up to +3000 Pa
Operating air velocity:	max. 30 m/s
Bending radius:	min. 1 x Ø
Standard diameter range:	80 – 500 mm
Standard length:	3 mtr

CONSTRUCTION

Total layers:	1 of 80 micron
---------------	----------------


CLASSIFICATIONS

EU (EN 13501-1):	A1
UK (BS476):	Part 4, 6, 7 and 20
FR (NF):	M0
DE (DIN4102):	A1


STANDARDS

Fulfilling:	
NEN-13180	Yes
REACH	Yes
ROHs	Yes


PRESSURE LOSS (STRAIGHT DUCT)

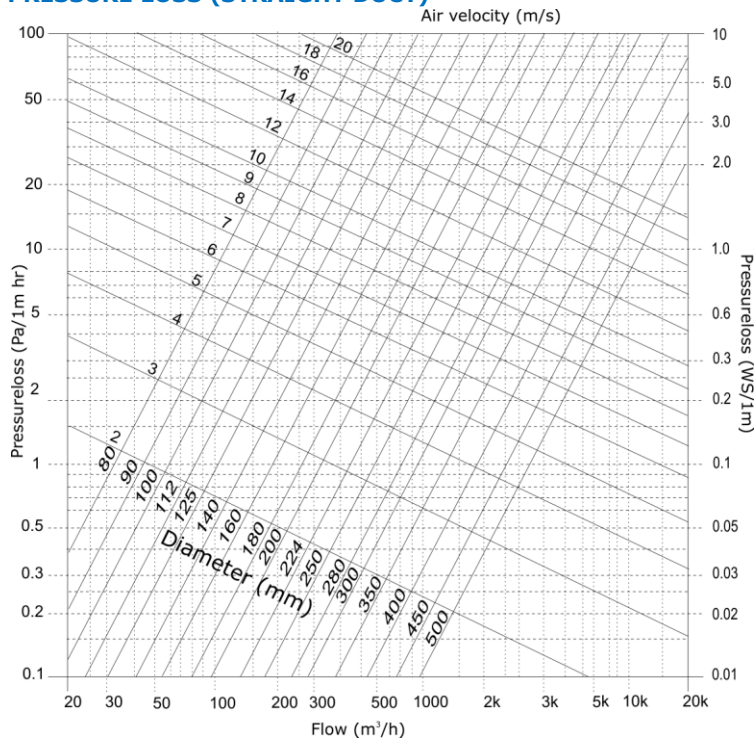

HOW TO INSTALL

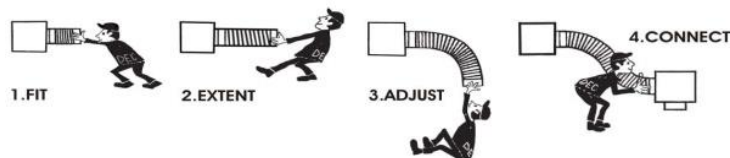

D(mm)	Tolerance	DA (mm)
080	+1,0 / -0	087
100	+1,0 / -0	107
125	+1,0 / -0	132
140	+1,0 / -0	147
150	+1,5 / -0	157
160	+1,5 / -0	167
180	+1,5 / -0	187
200	+1,5 / -0	207
224	+1,5 / -0	231
250	+2,0 / -0	257
280	+2,0 / -0	287
300	+2,0 / -0	307
315	+2,0 / -0	322
355	+2,0 / -0	402
400	+2,0 / -0	407
450	+2,5 / -0	457
500	+2,5 / -0	507



LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

TRADEMARKS:

SEMIDEC, The DEC logo and DEC International are trademarks, or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.

RESTRICTIONS:

The SEMIDEC ducts are not suitable for discharging combustion products from open fireplaces and oil-fired boilers. Neither are the ducts suitable for transporting air with a high concentration of acid and base.

